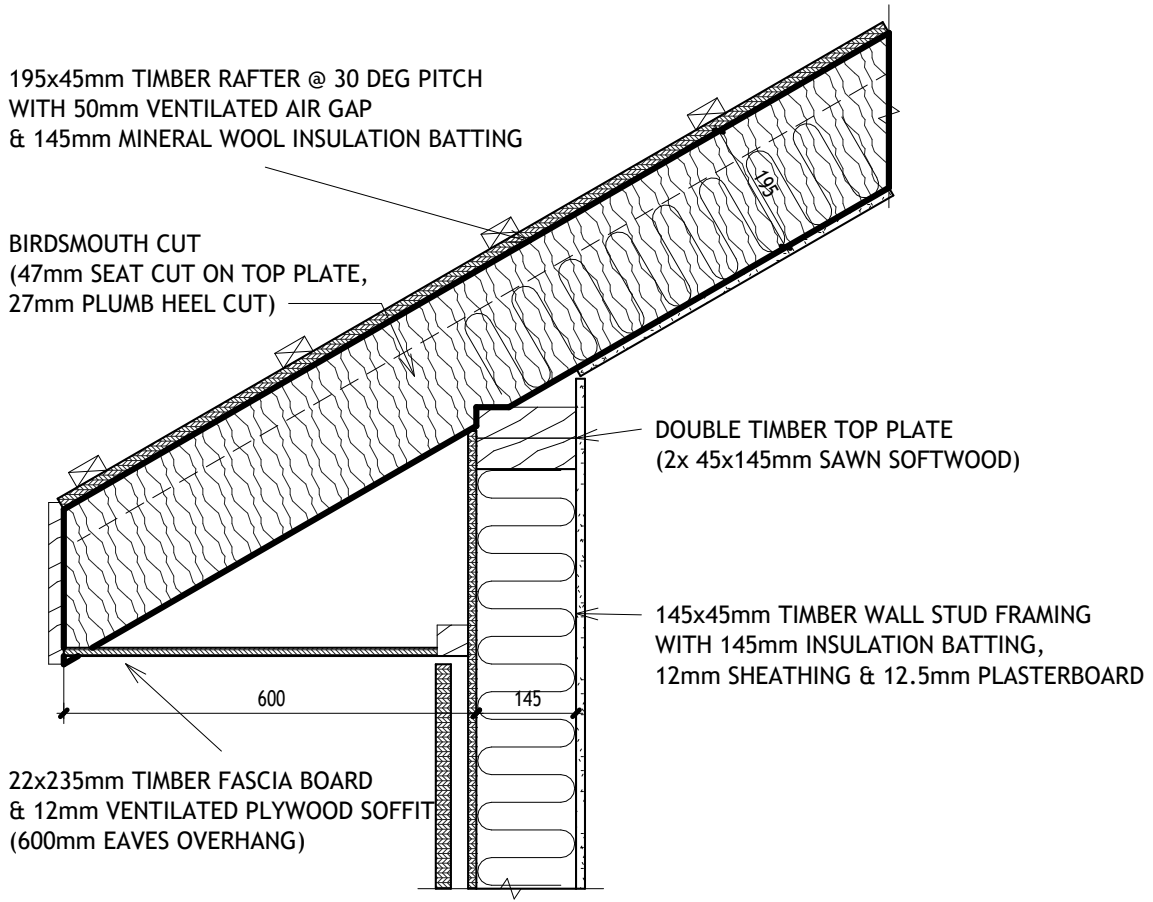

195x45mm TIMBER RAFTER @ 30 DEG PITCH
WITH 50mm VENTILATED AIR GAP
& 145mm MINERAL WOOL INSULATION BATTING
BIRDSMOUTH CUT
(47mm SEAT CUT ON TOP PLATE,
27mm PLUMB HEEL CUT)
195
DOUBLE TIMBER TOP PLATE
(2x 45x145mm SAWN SOFTWOOD)
145x45mm TIMBER WALL STUD FRAMING
WITH 145mm INSULATION BATTING,
12mm SHEATHING & 12.5mm PLASTERBOARD
600
145
22x235mm TIMBER FASCIA BOARD
& 12mm VENTILATED PLYWOOD SOFFIT
(600mm EAVES OVERHANG)